
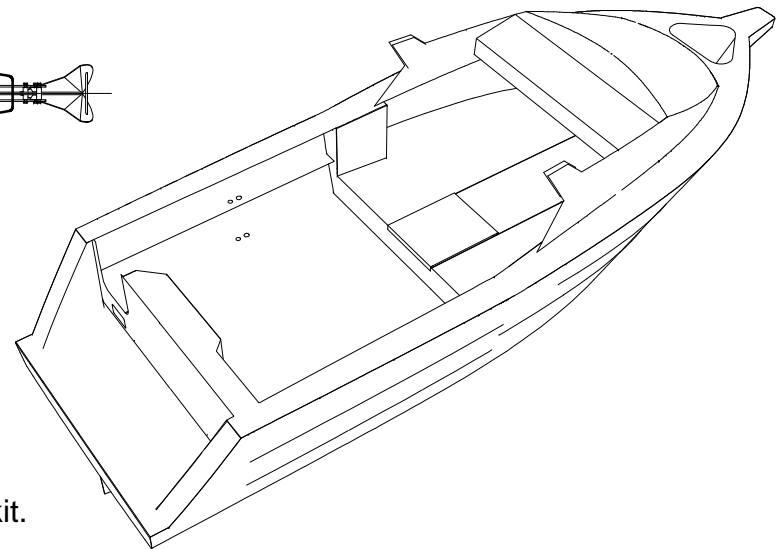
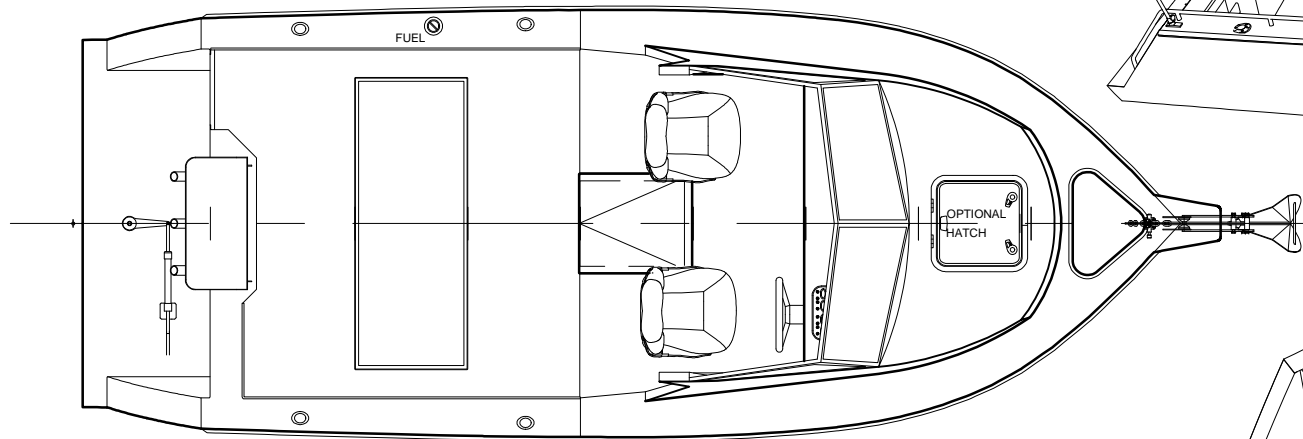
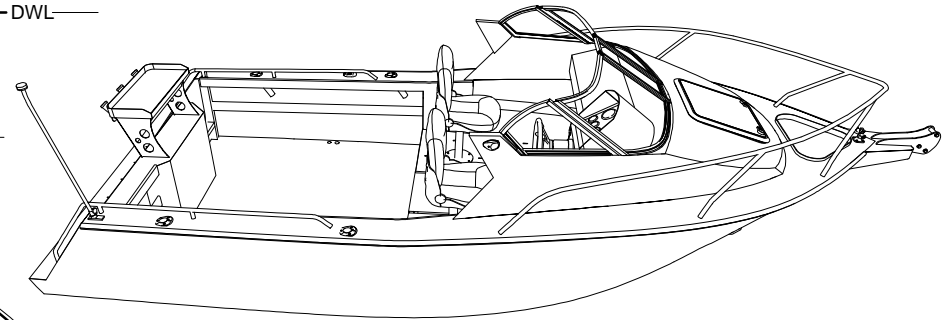


5.9m DISPLACEMENT GENERAL ARRANGEMENT

PRINCIPAL PARTICULARS

LOH: 5.90 m (Hull Only)
 BEAM: 2.35m
 DEPTH: 1.77m
 DRAFT: 0.58m
 DISPL: 1050kg DRY -w- 100HP
 ENG: 9-15hp Inboard

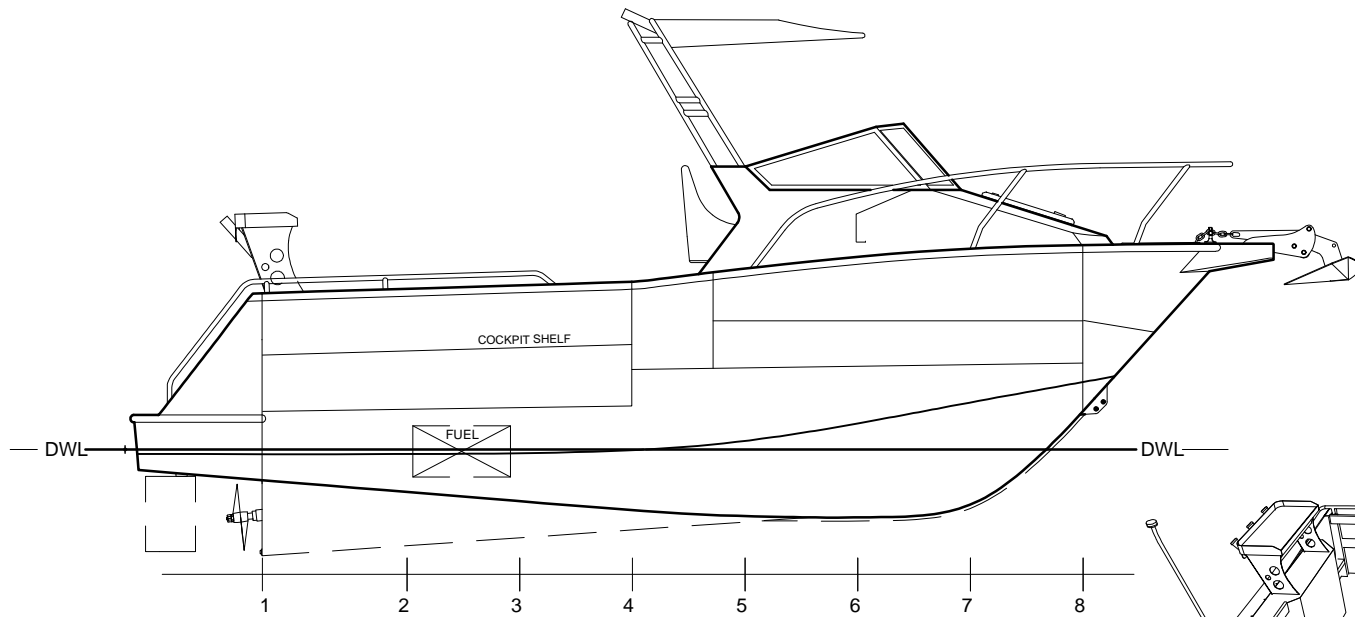

www.platealloy.com

AUSTRALIAN BUILDERS PLATE	
BUILDER	"YOUR NAME"
HIN AU	"SEE REGISTRATION"
Max	15 hp
	110 kg
Max	6
Max	540 kg
Buoyancy BASIC Flotation	
Alteration of the boat's hull or permanent fittings may invalidate the particulars on this plate.	
A REDUCTION IN MAXIMUM NUMBER OF PERSONS MUST BE MADE IN ADVERSE WEATHER CONDITIONS OR WHEN ON THE OPEN SEA.	

- Design in compliance with AS1799-1 2009
- Structure in accordance with ISO 12215
- Entire kit 4mm 5083 aluminium.
- Builders plate, Jig, Drawings & Photo CD included with kit.
- Bollards, Scuppers, Inspection port & Drain plug included in the kit.
- 5 days per week helpdesk available
- Customization available.
- Flotation foam & most fit out parts available, check catalogue for pricing.
- HIN number engraved in kit & and registered.

ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN






PLATE ALLOY

5.9 DISPLACEMENT



PLATE ALLOY
www.platealloy.com

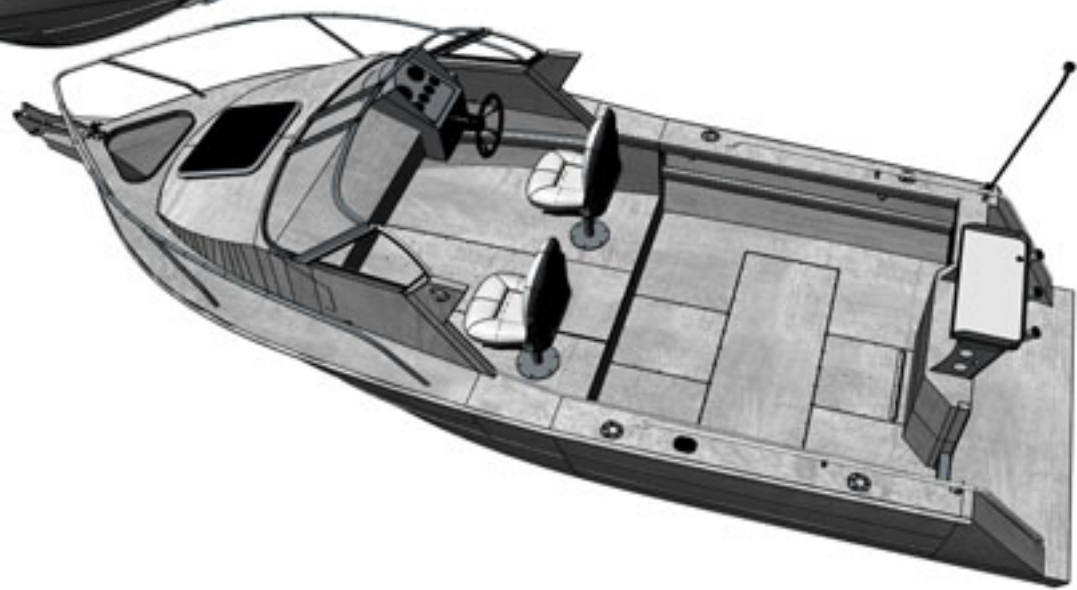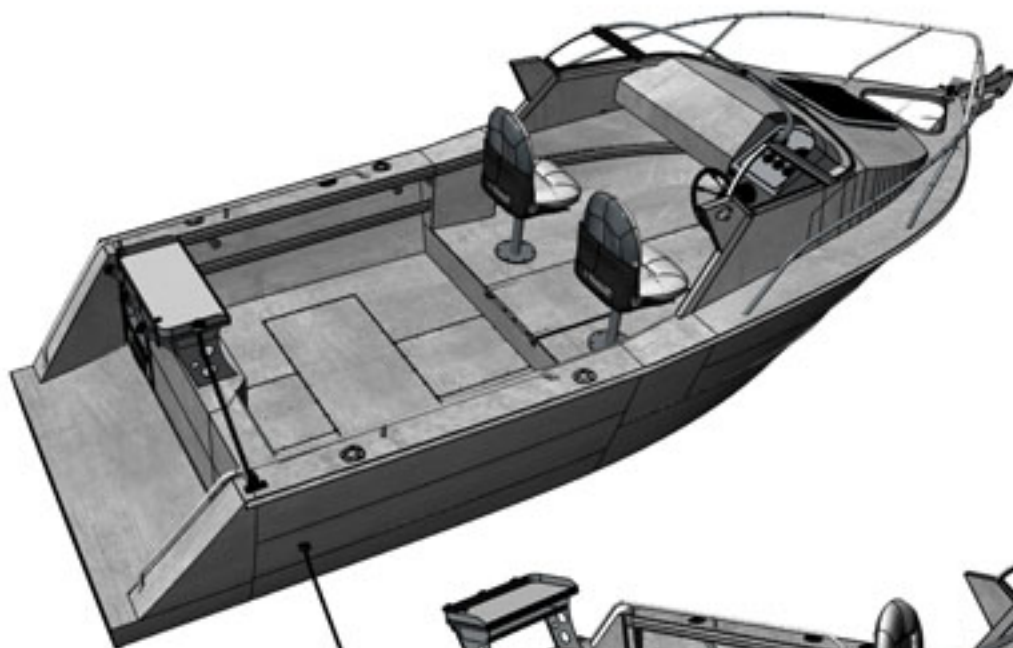

5.9 DISPLACEMENT



PLATE ALLOY
www.platealloy.com

